



## Overall Dimensions

(unit : mm)



### AX1(SHADED MOTOR)



### AX1(TESC MOTOR)




### AX2(TESC MOTOR)





MODEL	DIMENSION	A	B	C	D
AX□-21,51,12		156	49.5	184	198
AX□-32		156	49.5	186	198
AX□-52		198	53.5	192	219
AX□-13		204	54	192	222

### AX3(TESC MOTOR)

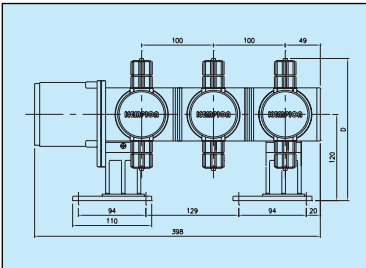

### SIDE VIEW(Common)

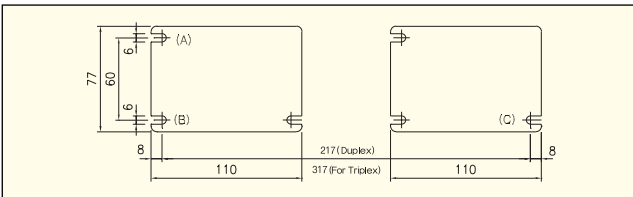

※Point (A),(B),(C) are to be anchored.

## Accessories List(Based on single head)

Part Name	Connection	Hose	Flange
Hose		3M	-
Strainer Foot Valve		1SET	-
Anti-Siphon check valve		1SET	-
Mounting Bolts(With nut M5×0.8×20)		3SET	3SET
Hexagonal L-Wrench (M5 Subtense 2.5)		1	1
Instruction Manual		1	1


※ In case of Multiplex Head, the above quantity will be multiplied by the head number(except for hose pump, L-Wrench, Manual)

※ For Air Relief Valve type, the hose(0.5M) for Air Relief Valve will be provided.


## Performance curve

— 60Hz ---50Hz CONDITIONS:ROOM TEMP, CLEAN WATER, SUCTION HEAD-1m


### AX1-21

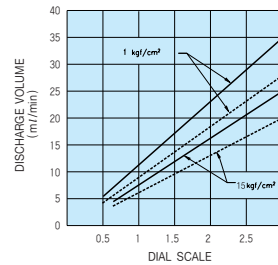


### AX1-51




### AX1-12




### AX1-32

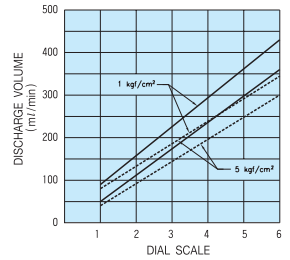

### AX1-52

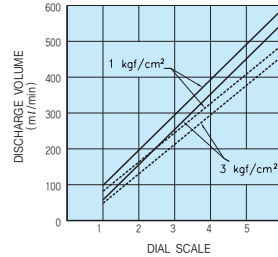

### AX1-13

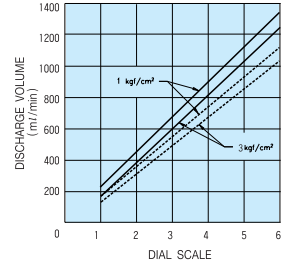

## When Placing Order

In order to provide the most suitable pump, please provide the following information.

### 1. Specification of liquid

- liquid name
- Ingredients
- Concentration(%) : ▲ Normal ▲ Range of variation
- Temperature(°C) : ▲ Normal ▲ Range of variation
- Viscosity(cp) : ▲ Normal ▲ Range of variation
- Specific gravity

### 2. Conditions of installation

- Purpose of use
- Requir capacity(ml/min) : ▲ Normal ▲ Maximum
- Suction side piping : ▲ Pipe dia. ▲ Piping length ▲ Height ▲ Other
- Discharge side piping : ▲ Pipe dia. ▲ Piping length ▲ Height ▲ Other
- Power source : ▲ Voltage(V) ▲ Frequency(Hz) ▲ Other
- Ambient temperature(°C) : ▲ Normal ▲ Maximum
- Installation location : ▲ Indoor ▲ Outdoor
- Mounting method
- Operating condition : ▲ Continuous operation ▲ Intermittent operation

### 3. Other

- Desired delivery date and place
- Any other requirement